

PRECISION 100°C PRE-TAPED MASKING FILM

TECHNICAL DATA SHEET **1092**

V1 (07/25)


PRODUCT DESCRIPTION

JTAPE Pre-Taped Masking Film is a pre-taped, high-density polyethylene film suitable for protecting areas from overspray during the painting process. The product consists of a high-density polyethylene film, folded multiple times to reduce roll-size and a high-temp precision washi tape. The product is corona treated to increase the hold of mist and general paint overspray; will cling to most surfaces and the tape offers clean residue-free removal.

Available in various film widths:

(1092.3525): 0.35m / (1092.6025): 0.60m / (1092.1225): 1.20m / (1092.1825): 1.80m

PRODUCT CONSTRUCTION

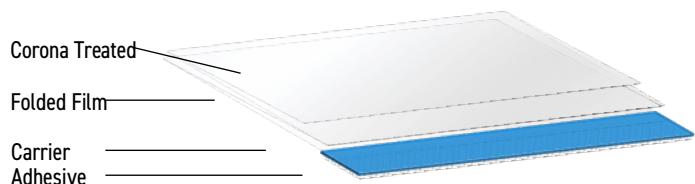

SHELF LIFE

12 months from date of receipt by customer when stored at 25°C ±10°C (77°F ±18°F) and 60% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

	1092.3525	1092.6025	1092.1225	1092.1825
Film Material	Corona-treated Polyethylene film	Corona-treated Polyethylene film	Corona-treated Polyethylene film	Corona-treated Polyethylene film
Film Adhesive	Non-Adhesive Electrostatically Charged	Non-Adhesive Electrostatically Charged	Non-Adhesive Electrostatically Charged	Non-Adhesive Electrostatically Charged
Film Colour	Clear (Translucent)	Clear (Translucent)	Clear (Translucent)	Clear (Translucent)
Film Thickness	9µm / 0.009mm (±10%)			
Tape Substrate	Washi rice paper	Washi rice paper	Washi rice paper	Washi rice paper
Tape Adhesive	Water-based acrylic	Water-based acrylic	Water-based acrylic	Water-based acrylic
Tape Colour	Blue	Blue	Blue	Blue
Total Width	360mm (±5%)	610mm (±5%)	1210mm (±5%)	1820mm (±5%)
Length	25m (±5%)	25m (±5%)	25m (±5%)	25m (±5%)

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Tape Adhesion	>1.5N/25mm	>1.5N/25mm	>1.5N/25mm	>1.5N/25mm
Temp Resistance	Up to 100°C (212°F) for ≤1hr.			

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The user is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for the user's application. Please remember that many factors can affect the use and performance of a JTAPE product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.